

Discotom-60/-65



Discotom-60/-65 offers you a spacious cutting table and maximum user-friendliness, allowing for easy clamping and sectioning of your large and irregular workpieces



The Discotom-60/-65 successfully combines the latest cutting technologies with unprecedented flexibility and user-friendliness. Discotom-60/-65 is a powerful table top cutting machine, designed for 300 mm cut-off wheels and equipped with a large cutting table of (w) 435 x (d) 265 mm.

Discotom-65 has the added benefit of variable rotational speed.

- Versatile automatic and manual cutting machine in one offering exceptional flexibility
- Automatic Feed Speed Control for fast cutting of hard materials without risk of damaging wheel or sample
- Programmable stop offering three different Stop Modes
- Large display and a joystick-controlled y-table for maximum user-friendliness
- Powerful illumination of cutting chamber for easy clamping and cutting
- Corrosion resistant cutting chamber for a long product lifetime
- Variable rotational speed for optimum cutting, and cutting of hard and soft materials without changing cut-off wheel

Extended cutting capacity

The Discotom-60/-65 allows for easy clamping and sectioning of all metallographic samples with a diameter of up to 105 mm (4.1"). Using automatic cutting, samples of e.g. 160 mm depth x 65 mm height or 178 mm depth x 35 mm height can be cut. It is possible to cut samples as long as 435 mm in automatic mode. Please refer to the cutting capacity diagram, which shows the capacity for automatic cutting. If manual and automatic cutting are used in combination, the capacity increases significantly.

Thus, when operated automatically as well as manually, Discotom is offering exceptional flexibility.

Save time by Automatic Feed Speed Control

The unique Automatic Feed Speed Control does not just reduce feed

speed, but is also capable of testing a preset feed speed after a motor overload, and resume cutting using this speed. In other words, feed reduction is done only as and when absolutely necessary, meaning that no time is wasted.

If, during testing, the feed speed does not cause a second motor overload, cutting will continue at the pre-set feed speed. If, instead, cutting fails a third time, the feed speed will be reduced by 20% at which cutting will resume. This process will repeat itself until the feed speed is reduced to 10% of the pre-set value.

The optimum feed speed

When the operator has found the optimum feed speed for a particular workpiece he or she can cut similar workpieces, without any problems. The process can be tracked on the Motor Load and Feed Speed bars on the display.

Programmable stop

Discotom-60/-65 features three different Stop Modes for fast and easy cutting: AutoStop, Absolute Stop Position and Relative Stop Position.

AutoStop

Cutting stops when the sample has been cut through.

Absolute Stop Position

Cutting stops at a pre-set position counted from zero position where the table is at the very front of the cutting chamber. The positioning range is 0-200 mm.

Relative Stop Position

Cutting stops at a position relative to the position where cutting starts. Thus, after entering the approximate sample size, the cutting process will stop immediately after the sample has been cut through. The positioning range is 0-200 mm.


Maximum user-friendliness

Discotom-60/-65 is equipped with a large display and a joystick-controlled y-table.

Cutting parameters and cutting mode are fast and easily selected via the turn/push-knob.

Graphic display


The large LCD display permits the graphic display of a lot of information in an easy-to-read fashion:

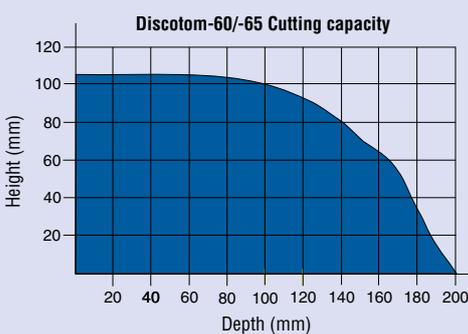

The cutting table is provided with 10 mm T-slots allowing various clamping tools to be used.



Discotom-60/-65 provides a powerful illumination of the cutting chamber for optimum visual control.

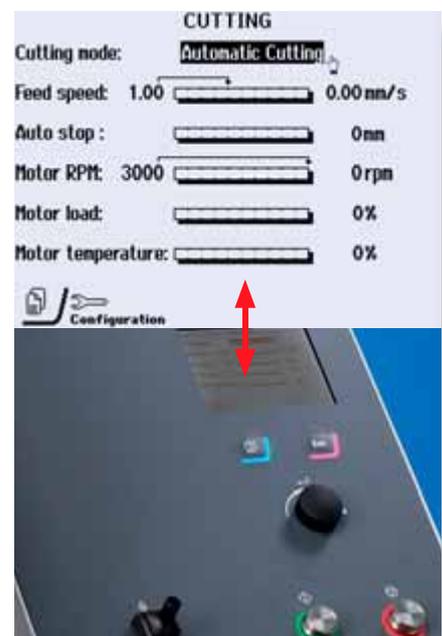

Discotom-60/-65 is equipped with a large easy-to-read display and user-friendly turn/push knob.

Cutting mode

The top bar lets the user select between Automatic Cutting (with moving y-table) and Manual Cutting (manually moving the cut-off wheel into the sample).

Feed Speed bar

The Feed Speed bar presets the Feed Speed. The Automatic Feed Speed Control may interfere on this preset speed as and when necessary.

Rotational speed (rpm)

On Discotom-65 the user can select a spindle speed between 1000 and 3000 rpm. By changing the spindle speed, the properties of the cut-off wheel change. In effect, one cut-off wheel can be used for a wide range of materials, wasting no time changing wheels.

Stop position

Pop-up menu for choice of 3 different ways of programming the stop. Please refer to separate section, called Programmable Stop.

Motor Load bar

The load bar indicates the load on the cutting motor. The load bar range is 0-200%. 200% indicates heavy overload of the motor, which of course should be avoided.



The Recirculation Cooling System extends the lifetime of the cooling water, and effectively removes swarf (option).

Effective cooling during cutting

Discotom-60/-65 should be configured with the Cooling System, containing a 100 litre tank and a small pump. Choice of control unit (Cooli-1/-3/-5) depends on required filter type and/or whether Cooli accessories are required.

For intensive use, and for materials generating a lot of swarf, we always recommend the use of bandfilter, which requires either the Cooli-3 or -5 control unit. Otherwise, the static filter will suffice.

For easy configuration, we offer Cooling System 6 with all the necessary elements. The complete Cooli unit will fit into the practical table unit, LABUL, (specifications overleaf).

Built-in flush hose for cleaning

As the only cutting machine in this range, Discotom comes with an external flushing hose. The waterflow is adjusted directly on the watergun.

High level of safety

The Discotom-60/-65 has an electric, dynamic motor which allows to stop the cutting motor within a few seconds.

The safety lock, which ensures that the operator cannot be injured by a rotating cut-off wheel, will open for



Discotom-60/-65 on practical LABUL table unit (optional).



Struers cut-off wheels are especially designed for Struers machines, taking into consideration the most recent developments in wet cutting techniques.

access to the cutting chamber as soon as a sensor detects that the cut-off wheel is not rotating.

During cutting, the protection guard is locked. If the protection guard is forcible opened, the cut-off wheel will immediately stop spinning.

For cutting of very long workpieces which cannot fit into the cutting chamber, an opening is made in the left side wall, which is accessed via a 'tunnel' on the outside. This effectively prevents anybody from harming him- or herself on the cut-off wheel. The tunnel is offered as an option.

A long product lifetime

The top of the cutting table is fitted with stainless steel bands which are very resistant to corrosion. If damaged, the steel bands are easily exchanged.

SPECIFICATIONS

Discotom-60/-65

Automatic cutting machines. Automatic feed with electronic control of feed speed. Manual operation possible. For 300 mm (12") cut-off wheels. Cutting table with 10 mm T-slots. 4.0 kW (5.4 HP) motor. Recirculation cooling unit, clamping devices and table unit are ordered separately.

Discotom-60

Code:	TRELX
Cat.no:	Voltage:
05906129	3 x 200-210 V / 50-60 Hz
05906135	3 x 220-230 V / 50 Hz
05906136	3 x 220-240 V / 60 Hz
05906146	3 x 380-415 V / 50 Hz
05906154	3 x 460-480 V / 60 Hz

Discotom-65

Code:	TRELV
Cat.no:	Voltage:
05916135	3 x 220-230 V / 50 Hz
05916136	3 x 200-240 V / 50-60 Hz
05916146	3 x 380-415 V / 50-60 Hz
05916154	3 x 460-480 V / 60 Hz

Accessories

Cooling System 6

With 100 l water tank (COLLT), Small pump (COLLS), 100 l static filter* (COLLF) and Cooli-1* control unit (COOL1)

Code:	COLSY
Cat.no:	Voltage:
05766816	1 x 100 V / 50 Hz
05766822	1 x 120 V / 60 Hz
05766823	1 x 220 V / 50 Hz
05766824	1 x 240 V / 60 Hz
05766916	1 x 100-120 V / 50/60 Hz CSA

*) For intensive use, bandfilter (COLBF) and Cooli-3 (COOL3) are required.

Table unit

For Labotom, Discotom and Unitom. With compartment for recirculation cooling unit. Width: 900 mm, depth: 750 mm, height: 800 mm.

Code:	LABUL
Cat.no:	05116916

Quick-clamping Device for 10 mm T-slots, Left

For securing the workpiece. Complete with back stop. To be mounted on the left-hand side of the cut-off wheel.

Code:	TRELQ
Cat.no:	05116903

Quick-clamping Device for 10 mm T-slots, Right

For securing the work piece. Complete with back stop. To be mounted on the right-hand side of the cut-off wheel.

Code:	TRERQ
Cat.no:	05116917

Replacement Stainless Steel Band

For cutting table on Discotom-60/-65. 1 pc. of 40 mm x 265 mm.

Code:	TRELB
Cat.no:	05906901

TECHNICAL DATA

Subject	Specification
Cut-off wheel size	300 mm / 12"
Cutting motor	Constant cutting power (S1): 4.0 kW / 5.4 HP Intermittent cutting power (S3): 4.7 kW / 6.3 HP
Rotational speed	Discotom-60: 2860 rpm at 50 Hz, 3415 rpm at 60 Hz Discotom-65: 1000-3000 rpm at 50/60 Hz
Cutting Table w x d Cutting table movement	435 mm x 265 mm (17.1" x 10.4") 200 mm (7.8")
Cutting capacity	Ø 105 mm (4.1") 160 mm at 65 mm height 120 mm at 90 mm height
Recirculating cooling unit, COLSY, (option)	100 l (26.4 gallons) tank volume 42 l/min (11 gallons/min) flow at 0.2 bar
Dimensions w x h x d	700 mm x 795 mm x 750 mm 27.5" x 31.3" x 29.5"
Table unit, LABUL (option)Dimensions w x h x d	900 mm x 750 mm x 800 mm 35.4" x 29.5" x 31.5"
Weight	171 kg (377 lbs)
EU-directives	98/37/EEC - Safety of Machinery 73/23/EEC - Low Voltage Directive 89/336EEC, 92/31/EEC, 93/68/EEC - EMC Directive
Dynamic Balancing	Max. admissible unbalance Uper according to ISO 1940/1, Balance Quality Grade G6.03: Uper = 2 gmm/kg = 110 gmm.
Noise Level	Approx. 67 dB(A) during cutting, at a distance of 1.0 m/39.4" from the machine.

Struers' equipment is in conformity with the provisions of the applicable International Directives and their appurtenant Standards. (Please contact your local supplier for details)

Struers' products are subject to constant product development. Therefore, we reserve the right to introduce changes in our products without notice.



USA and CANADA

Struers Inc.

24766 Detroit Road
Westlake, OH 44145-1598
Phone +1 440 871 0071
Fax +1 440 871 8188
info@struers.com

SWEDEN

Struers A/S

Smältvägen 1
P.O. Box 11085
SE-161 11 Bromma
Telefon +46 (0)8 447 53 90
Telefax +46 (0)8 447 53 99
info@struers.dk

FRANCE

Struers S.A.S.

370, rue du Marché Rollay
F- 94507 Champigny
sur Marne Cedex
Téléphone +33 1 5509 1430
Télécopie +33 1 5509 1449
struers@struers.fr

NEDERLAND/BELGIE

Struers GmbH Nederland

Electraweg 5
NL-3144 CB Maassluis
Tel. +31 (0) 10 599 72 09
Fax +31 (0) 10 599 72 01
glen.van.vugt@struers.de

BELGIQUE (Wallonie)

Struers S.A.S.

370, rue du Marché Rollay
F- 94507 Champigny
sur Marne Cedex
Téléphone +33 1 5509 1430
Télécopie +33 1 5509 1449
struers@struers.fr

UNITED KINGDOM

Struers Ltd.

Unit 25a
Monkspath Business Park
Solihull
B90 4NZ
Phone +44 0121 745 8200
Fax +44 0121 733 6450
info@struers.co.uk

JAPAN

Marumoto Struers K.K.

Takara 3rd Building
18-6, Higashi Ueno 1-chome
Taito-ku, Tokyo 110-0015
Phone +81 3 5688 2914
Fax +81 3 5688 2927
struers@struers.co.jp

CHINA

Struers Ltd.

Office 702 Hi-Shanghai
No. 970 Dalian Road
Shanghai 200092, P.R. China
Phone +86 (21) 5228 8811
Fax +86 (21) 5228 8821
struers.cn@struers.dk

Struers A/S

Pederstrupvej 84
DK-2750 Ballerup, Denmark
Phone +45 44 600 800
Fax +45 44 600 801
struers@struers.dk

DEUTSCHLAND

Struers GmbH

Karl-Arnold-Strasse 13 B
D-47877 Willich
Telefon +49(02154) 486-0
Telefax +49(02154) 486-222
verkauf.struers@struers.de

ÖSTERREICH

Struers GmbH

Zweigniederlassung Österreich
Ginzkeyplatz 10
A-5020 Salzburg
Telefon +43 662 625 711
Telefax +43 662 625 711 78
stefan.iintschinger@struers.de

SCHWEIZ

Struers GmbH

Zweigniederlassung Schweiz
Weissenbrunnstrasse 41
CH-8903 Birmensdorf
Telefon +41 44 777 63 07
Telefax +41 44 777 63 09
rudolf.weber@struers.de

CZECH REPUBLIC

Struers GmbH

Organizační složka
Havlíčková 361
CZ-252 63 Rostoky u Prahy
Tel: +420 233 312 625
Fax: +420 233 312 640
david.cernicky@struers.de

POLAND

Struers Sp. z o.o.

Oddział w Polsce
ul. Lirowa 27
PL-02-387 Warszawa
Tel. +48 22 824 52 80
Fax +48 22 882 06 43
grzegorz.uszynski@struers.de

HUNGARY

Struers GmbH

Magyarországi fióktelep
Puskás Tivadar u. 4
H-2040 Budaörs
Phone +36 (23) 428-742
Fax +36 (23) 428-741
zoltan.kiss@struers.de

SINGAPORE

Struers A/S

10 Eunos Road 8,
#12-06 North Lobby
Singapore Post Centre
Singapore 408600
Phone +65 6299 2268
Fax +65 6299 2661
struers.sg@struers.dk